



İçindekiler - Index ____

01	. Hafif Tip Yer Giderleri . Light Type Floor Grids	. S 01 - 04
02	. Ağır Tip Yer Giderleri . Heavy Type Floor Grids	. S 05 - 06
03	izolasyonlu Yer GiderleriInsulated Floor Grids	. S 07
04	. Slot Tip Yer Giderleri . Slot Type Floor Grids	. S 08
05	. Özel Tip Yer Giderleri . Special Type Floor Grids	. S 09
06	. Kollektörler . Collectors	. S 10
07	. Yağ Ayırıcılar . Oil Separators	. S 11 - 12
80	. Davlumbaz Filtreleri . Hood Filters	. S 13

Hafif Tip Yer Giderleri - Light Type Floor Grids A Serisi - A Series





It is made of AISI 304 - 316 quality stainless steel sheet. It is hygienic, does not hold grease and dirt, and is easy to clean. There is a special siphon system that prevents odor, mice and insects from the installation. There is an anchor system so that it can be fixed perfectly to the ground during installation. Grill outlet diameters are 50 - 70 - 100 cm PVC.

DRA-YI-4249

40 x 249

It is welded on all sides with a special welding technology belonging to our company, and these welds are perfect both in terms of hygiene and appearance. It has a waste trap strainer so that food residues or other residues do not clog the drains. There is a cleaning cover to intervene in these blockages against any blockages that may occur in the installation.

Hafif Tip Yer Giderleri - Light Type Floor Grids A Serisi - A Series





Hafif Tip Yer Giderleri - Light Type Floor Grids C Serisi - C Series






It is made of AISI 304 - 316 quality stainless steel sheet. It is hygienic, does not hold grease and dirt, and is easy to clean. There is a special siphon system that prevents odor, mice and insects from the installation. There is an anchor system so that it can be fixed perfectly to the ground during installation. Grill outlet diameters are 50 - 70 - 100 cm PVC.

It is welded on all sides with a special welding technology belonging to our company, and these welds are perfect both in terms of hygiene and appearance. It has a waste trap strainer so that food residues or other residues do not clog the drains. There is a cleaning cover to intervene in these blockages against any blockages that may occur in the installation.

Hafif Tip Yer Giderleri - Light Type Floor Grids C Serisi - C Series



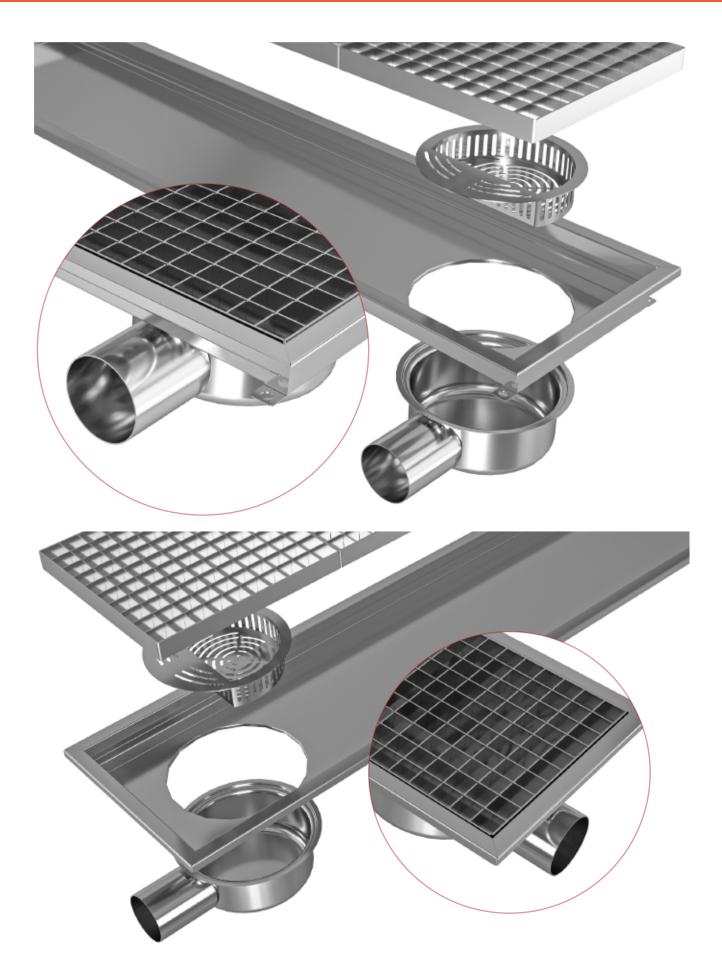

Ağır Tip Yer Giderleri - Heavy Type Floor Grids A Serisi - A Series



KOD - CODE	DEPTH	LENGHT	HEIGHT
DRA-YI-2020 DRA-YI-2030 DRA-YI-2050 DRA-YI-2074 DRA-YI-2094 DRA-YI-2118 DRA-YI-2138 DRA-YI-2161 DRA-YI-2181 DRA-YI-2205 DRA-YI-2225 DRA-YI-2249	20 x 20 x 20 x 20 x 20 x 20 x 20 x 20 x	30 50 74 94 118 138 161 181 205 225	x 14 x 14 x 14 x 14 x 14 x 14 x 14 x 14
KOD - CODE	DEPTH	LENGHT	HEIGHT
DRA-YI-3020 DRA-YI-3030 DRA-YI-3050 DRA-YI-3074 DRA-YI-3094 DRA-YI-3118 DRA-YI-3138 DRA-YI-3161 DRA-YI-3161 DRA-YI-3205 DRA-YI-3225 DRA-YI-3225	30 x	30 50 74 94 118 138 161	x 14 x 14 x 14 x 14 x 14 x 14 x 14 x 14
KOD - CODE	DEPTH	LENGHT	HEIGHT
DRA-YI-4020 DRA-YI-4030 DRA-YI-4050 DRA-YI-4074 DRA-YI-4094 DRA-YI-4118 DRA-YI-4161 DRA-YI-4161 DRA-YI-4205 DRA-YI-4205 DRA-YI-4249	40 x 40 x 40 x	30 50 74 94 118 138 161 181 205 225	x 14 x 14 x 14 x 14 x 14 x 14 x 14 x 14

It is made of AISI 304 - 316 quality stainless steel sheet. Heavy type drains are suitable for the passage of heavy vehicles such as forklifts, trucks, pallet trucks. Thanks to the techniques and materials specially applied by our company, it can pass over all weights. It is hygienic, does not hold grease and dirt, and is easy to clean. There is a special siphon system that prevents odor, mice and insects from the installation. There is an anchor system so that it can be fixed perfectly to the ground during installation. Grill outlet diameters are 50 - 70 - 100 cm PVC.

It is welded on all sides with a special welding technology belonging to our company, and these welds are perfect both in terms of hygiene and appearance. It has a waste trap strainer so that food residues or other residues do not clog the drains. There is a cleaning cover to intervene in these blockages against any blockages that may occur in the installation.

Ağır Tip Yer Giderleri - Heavy Type Floor Grids A Serisi - A Series





İzolasyonlu Yer Giderleri - Insulated Floor Drains



HEIGHT

HEIGHT

LENGHT

LENGHT



KOD - CODE

KOD - CODE



DRA-YI-3020 DRA-YI-3030 DRA-YI-3050 DRA-YI-3074 DRA-YI-3118 DRA-YI-3138 DRA-YI-3161 DRA-YI-3161 DRA-YI-3205 DRA-YI-3225 DRA-YI-3249	30 x 30 x 30 x 30 x 30 x 30 x 30 x 30 x	30 50 74 94 118 138 161 181 205 225	x 14 x 14 x 14 x 14 x 14 x 14 x 14 x 14
KOD - CODE	DEPTH	LENGHT	HEIGHT

KOD CODE	DEDTU	LENGUE	UEICUT
KOD - CODE	DEPTH	LENGHT	HEIGHT
DRA-YI-4020	40 x	20	x 14
DRA-YI-4030	40 x	30	x 14
DRA-YI-4050	40 x	50	x 14
DRA-YI-4074	40 x	74	x 14
DRA-YI-4094	40 x	94	x 14
DRA-YI-4118	40 x	118	x 14
DRA-YI-4138	40 x	138	x 14
DRA-YI-4161	40 x	161	x 14
DRA-YI-4181		181	
DRA-YI-4205	40 x	205	x 14
DRA-YI-4225	40 x	225	x 14
DRA-YI-4249	40 x	249	x 14

It is made of AISI 304 - 316 quality stainless steel sheet. Insulated drains are applied especially in order to prevent water leakage to the lower floors of the areas where they are applied. In this way, thanks to the equipment on it, the water reaches the drain without the danger of leakage. It is hygienic, does not hold grease and dirt, and is easy to clean. There is a special siphon system that prevents odor, mice and insects from the installation. There is an anchor system so that it can be fixed perfectly to the ground during installation. Grill outlet diameters are 50 - 70 - 100 cm PVC.


It is welded on all sides with a special welding technology belonging to our company, and these welds are perfect both in terms of hygiene and appearance. It has a waste trap strainer so that food residues or other residues do not clog the drains. There is a cleaning cover to intervene in these blockages against any blockages that may occur in the installation.

Slot Tip Yer Giderleri - Slot Type Floor Grids






304 and 316 quality stainless steel slot type floor drains that we are producing are suitable for use in all kinds of areas such as production facilities (heavy and light industry factories), hospitals, hotels, gasoline stations, shopping malls. It is hygienic and practical in use and takes incoming water or liquids very easily into its holes and transfers them to the sewage system. At the same time, it looks very stylish in appearance and does not look ugly and rough because it does not rust and corrode like channels made of iron. It is suitable for the passage of all kinds of vehicles (trucks, forklifts, pallet trucks, etc.). Station and slot channels are connected to each other and consist of 2 parts. The water and liquids entering the slot channel reach the station and are transferred to the sewer. It is measured and manufactured in accordance with your projects.





Özel Tip Yer Giderleri - Special Type Floor Grids



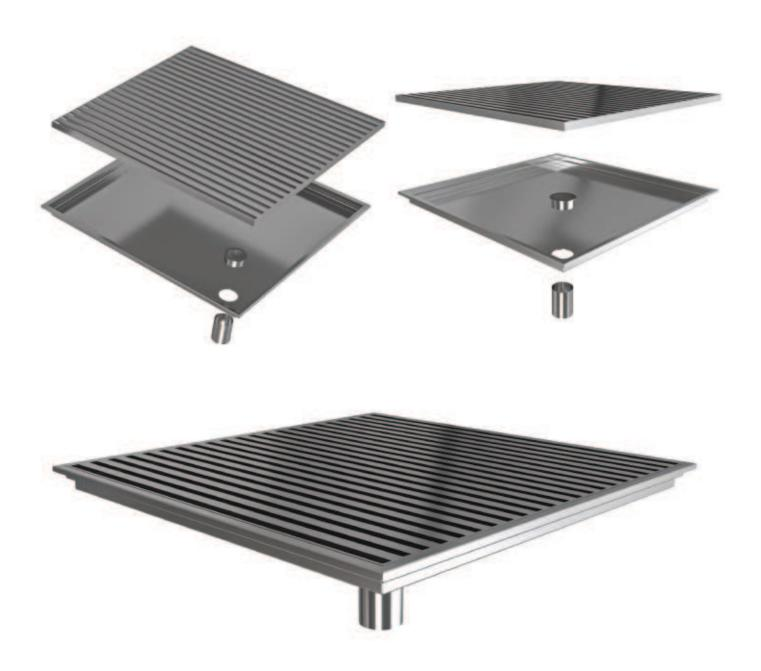

It is made of AISI 304 - 316 quality stainless steel sheet. It is hygienic, does not hold grease and dirt, and is easy to clean. There is a special siphon system that prevents odor, mice and insects from the installation. There is an anchor system so that it can be fixed perfectly to the ground during installation. Grill outlet diameters are 50 - 70 - 100 cm PVC.

It is welded on all sides with a special welding technology belonging to our company, and these welds are perfect both in terms of hygiene and appearance. It has a waste trap strainer so that food residues or other residues do not clog the drains. There is a cleaning cover to intervene in these blockages against any blockages that may occur in the installation.

According to the suitability of the place, special production is made in the desired dimensions in accordance with the quality standards. Floor grates collect the water spilled on the floor and the wastewater generated as a result of washing or using the appliances and deliver them to the sewer system.

Kollektörler - Collectors





Collectors are used for mechanical water fire extinguishing, fuel oil, propane gas, steam, fluid distribution at equal pressure and flow rate to the main lines in building mechanical water fire extinguishing. The desired number of mouths can be produced by special orders. Upon request, collectors with or without valves can be produced. It is made of AISI 304 - 316 quality stainless steel sheet. It is hygienic, does not hold oil and dirt, and is easy to clean. There is a special siphon system that prevents odor, mice and insects from the installation. There is an anchor system so that it can be fixed perfectly to the ground during installation. Collector outlet diameters are 50 - 70 - 100 cm PVC. It is welded on all sides with a special welding technology belonging to our company, and these welds are perfect both in terms of hygiene and appearance.

Yağ Ayırıcılar - Oil Separators





It is made of AISI 304 - 316 quality stainless steel sheet. It is hygienic, does not hold grease and dirt, and is easy to clean. There is a special siphon system that prevents odor, mice and insects from the installation. Oil separator outlet diameters are 50 - 70 - 100 cm PVC.

There are varieties such as under the sink and embedded in the floor, and they are determined and applied in accordance with the project. Thanks to its oil retention system, it prevents the mixing of oil into the installation.


It is welded on all sides with a special welding technology belonging to our company, and these welds are perfect both in terms of hygiene and appearance. It has a waste trap strainer so that food residues or other residues do not clog the installation. It can be made in various sizes in accordance with the projects. The capacity of the right separator should be calculated according to the instantaneous maximum wastewater flow, not the average amount of water used per day. In this system, the user must check the oil separator reservoir for certain periods.

Yağ Ayırıcılar - Oil Separators



TEZGAH ALTI YAĞ AYIRICILAR - UNDER TABLE GREASE SEPERATORS


KATI ATIK TUTUCU SEPETLİ - WITH SOLID WASTE HOLDER BASKET

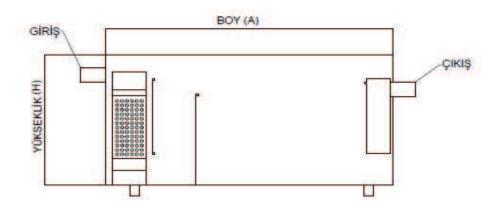

MODEL	CAPACITY	OIL COLLECTION CAPACITY L/S	INPUT OUTPUT	DIMENSIONS			
		CALACITE 175	OUTPUT	BOY (A) LENGHT (A)	EN (B) DEPTH (B)	YÜK. (H) HEIGHT H)	
DRA-KAS-025	0,25 lt/sc.	4 lt/sec.	Ø50 mm	450 mm	400 mm	450 mm	
DRA-KAS-050	0,50 lt/sc.	8 lt/sec.	Ø50 mm	600 mm	400 mm	450 mm	
DRA-KAS-075	0,75 lt/sc.	12 lt/sec.	Ø50 mm	750 mm	450 mm	450 mm	
DRA-KAS-100	1,00 lt/sc.	16 lt/sec.	Ø50 mm	900 mm	500 mm	450 mm	

ZEMİNE GÖMME YAĞ AYIRICILAR - BELOW GROUND GREASE SEPERATORS

KATI ATIK TUTUCU SEPETLİ - WITH SOLID WASTE HOLDER BASKET

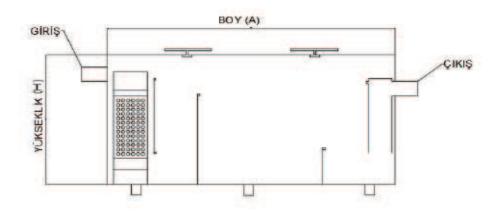

MODEL	CAPACITY	OIL COLLECTION	INPUT	INPUT DIMENSIONS					
MODEL	CAPACITY	CAPACITY L/S	OUTPUT	BOY (A) LENGHT (A)	EN (B) DEPTH (B)	YÜK. (H) HEIGHT H)	GİRİŞ (D) INPUT (D)	ÇIKIŞ (F) OUTPUT (F)	
DRA-KAS-1	1 lt/sec.	16 lt/sec.	Ø75 mm	1200 mm	650 mm	650 mm	500 mm	475 mm	
DRA-KAS-2	2 lt/sec.	32 lt/sec.	Ø110 mm	1400 mm	700 mm	750 mm	600 mm	550 mm	
DRA-KAS-3	3 lt/sec.	48 lt/sec.	Ø110 mm	1700 mm	800 mm	900 mm	750 mm	700 mm	
DRA-KAS-4	4 lt/sec.	64 lt/sec.	Ø110 mm	2000 mm	900 mm	1000 mm	850 mm	800 mm	
DRA-KAS-5	5 lt/sec.	80 lt/sec.	Ø125 mm	2300 mm	1000 mm	1100 mm	950 mm	900 mm	
DRA-KAS-7	7 lt/sec.	112 lt/sec.	Ø160 mm	2800 mm	1100 mm	1200 mm	1010 mm	1000 mm	·
DRA-KAS-10	10 lt/sec.	160 lt/sec	Ø200 mm	3100 mm	1400 mm	1400 mm	1150 mm	1100 mm	

Hood Filters - Davlumbaz Filtreleri



Filters made of stainless steel both control the flames that occur in special cooking techniques and prevent the spread of the flame in case of a possible flame. If the filter is washed regularly in dishwashers according to usage, it can be used for many years without degeneration. 400°C color change, 1200°C melting. We make 430 and 304 quality according to the request. Special sizes can be made upon request.

Our Dimensions: 50x50 - 50x40 - 50x25 - 40x40 - 40x25 Special Size Manufacturing Is Made According To Customer Demand





Contact us now for floor grids with affordable prices, the best quality, and fast production time!

